


慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD


REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE



P.C.B. LAYOUT

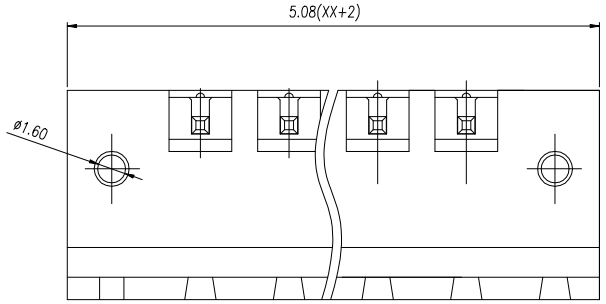



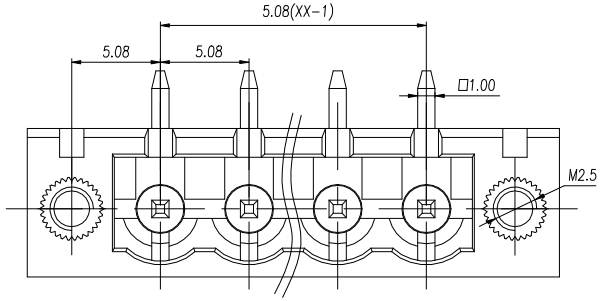

UL/CUL 技术参数 UL/CUL Technical Data			UL1059	
等级 Use Group		B	C	D
额定电压 Rated Voltage	[V]	300	-	300
额定电流 Rated Current	[A]	15	-	10
接线范围 Wire Range 单/多芯线 Solid/Stranded	[AWG]	-		
耐电压 Withstanding Voltage		1600V/1Min		
IEC 技术参数 IEC Technical Data		IEC61984		
过电压类别 Overvoltage Category		III	III	II
污染等级 Contamination Class		3	2	2
额定电压 Rated Voltage	[V]	250	320	400
额定电流 Rated Current	[A]	10	10	10
额定冲击电压 Impulse withstand voltage	[KV]	4.0	4.0	4.0
导线截面积 Conductor cross section 硬质/柔性导线 Solid/ flexible	[mm²]	-		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Imflammability		UL94V-0		
导体材料 Contactor Material		铜合金 Copper alloy		
导体表面镀层 Contactive Coating		镀锡 Sn Plated		
一般参数 Other Data				
间距 Pitch /极数 Poles	[mm] / [P]	5.08 / 02~24		
剥线长度 Stripping Length	[mm]	-		
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-		
工作温度 Operating temperature	[°C]	-40~105		
焊锡温度 Soldering temperature		260°C/5S		
引针尺寸 Pin Dimensions	[mm]	1.0*1.0		
PCB板孔径 PCB Hole Diameter	[mm]	Ø1.7		

linear dimension(Tolerances Standard GB/T 14486-2008)										
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角/THIRD ANGLE PROJECTION	版本 / REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称 / TITLE	WJ2EDGRRM-5.08-XXP-1YY-00A	